



RAILGATE SERIES



HIGH-CYCLE RAILGATE MODELS

NEW **BI-FOLDING PLATFORMS**

- HIGHER LIFTING CAPACITIES.
- LARGER PLATFORMS.
- 100% DOCK-COMPATIBLE.
- THE ELITE MEDIUM-DUTY RAILGATE.**

VIEW PRODUCT IMAGES AND OPERATION VIDEOS AT TOMMYGATE.COM

NEW BI-FOLD, HIGH-CYCLE MODELS

The most versatile, dependable liftgates ever seen in a loading bay, Bi-Fold, High-Cycle models support large steel platforms and high lifting capacities while still remaining completely dock-compatible. The platform drop-down function allows work vehicles to load and unload in any manner at any location. →

SCAN FOR VIDEO



Model Shown:
89-25 BF TP70

Drop-down platform position not designed for vehicle in transit.

A SAFETY-TRIP BAR

disengages the lift when an object is detected between the rising platform and the liftgate mainframe

B LOW-PROFILE CONTROL

reduced size simplifies operation

C SELF-CLOSE ARM

cam-arm system opens/closes the platform automatically

D RETENTION RAMP STANDARD, 13-INCH TAPERED ALUMINUM




1

ramp closes for storage



2

ramp locks at 90-degrees for cart retention

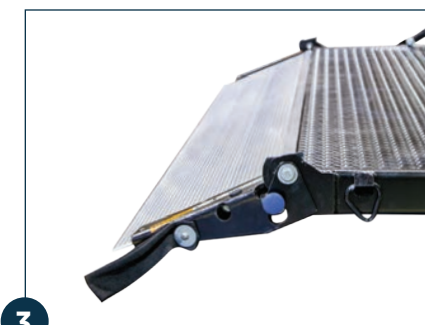

3

extended ramp hangs beyond platform level for smooth ground every time



B

FIXED-PLATFORM, HIGH-CYCLE MODELS

SCAN FOR VIDEO



Tommy Gate High-Cycle Railgate models support large steel and aluminum platforms and are specifically designed to maximize smoothness of motion, endurance, and strength.

1 SELF-CLOSE ARM

cam-arm system opens/closes the platform automatically

2 SAFETY-TRIP BAR

disengages the lift when an object is detected between the rising platform and the liftgate mainframe



1



Model Shown:
89-30 EA55

2

HIGH-CYCLE RAILGATES

Tommy Gate High-Cycle Railgate models are expertly-engineered lifts which feature higher weight capacities, larger platforms, and a wide variety of valuable standard features. The unique steel-roller-and-pulley drive system offers a consistent and dependable lifting action while also reducing maintenance requirements. The ideal liftgate for frequent cycling—in any climate—day in and day out.

EVERY TOMMY GATE® LIFTGATE IS PROUDLY MADE IN WOODBINE, IOWA, USA.



STEEL ROLLERS

Steel rollers guide the platform vertically within the rail and are designed to withstand intensive cycling. Dual-sealed, maintenance-free ball bearings ensure the rollers are long-lasting and perform consistently in all climate conditions.



RAILGATE SERIES HIGH-CYCLE MODELS

Bi-Fold High-Cycle Models for 96- & 102-inch Wide Bodies

TWO-YEAR STANDARD WARRANTY

	Model Number	Body	Load Area	Taper ³	Bed Heights ¹	Gate Weight
2500 lb. Capacity	Treadplate Platforms ²					
	89-25 BF TP60	96	83 x 60	13	34 - 54	1320
	89-25 BF TP70	96	83 x 70	13	38 - 54	1378
	95-25 BF TP60	102	89 x 60	13	34 - 54	1362
	95-25 BF TP70	102	89 x 70	13	38 - 54	1420
3000 lb. Capacity	Treadplate Platforms					
	89-30 BF TP60	96	83 x 60	13	34 - 54	1320
	89-30 BF TP70	96	83 x 70	13	38 - 54	1378
	95-30 BF TP60	102	89 x 60	13	34 - 54	1362
	95-30 BF TP70	102	89 x 70	13	38 - 54	1420

Fixed-Platform, High-Cycle Models for 96" Wide Bodies²

TWO-YEAR STANDARD WARRANTY

	Model Number	Body	Load Area	Taper	Bed Heights ¹	Gate Weight
2500 lb. Capacity	Treadplate Platforms					
	89-25 TP36	96	89 x 36	12	32 - 54	1040
	89-25 TP42	96	89 x 42	12	32 - 54	1094
	89-25 TP48	96	89 x 48	12	32 - 54	1147
	Aluminum Platforms ⁴					
	89-25 EA55	96	89 x 55	12	32 - 54	968
3000 lb. Capacity	Treadplate Platforms					
	89-30 TP36	96	89 x 36	12	32 - 54	1040
	89-30 TP42	96	89 x 42	12	32 - 54	1094
	89-30 TP48	96	89 x 48	12	32 - 54	1147
	Aluminum Platforms ⁴					
	89-30 EA55	96	89 x 55	12	32 - 54	968

Standard Features & Available Options

Standard Features	Steel Rollers	Safety Trip Bar	Self-Close System	Recessed Lights	Low-Profile Control	13" Retention Ramp	12" Platform Taper
Available For:							
Bi-Fold, High-Cycle Models	●	●	●	●	●	●	
Fixed-Platform High-Cycle Models	●	●	●	●			●

Additional Options	Above-Bed Travel	Recessed LED Lights	Dual Controls (w/ pendant)	Split Cart Stops	In-Cab Shut Off
Available For:					
Bi-Fold, High-Cycle Models	●	●	●		●
Fixed-Platform High-Cycle Models	●	●	●	●	●

- NOTES:**
1. Minimum bed height range is **laden**. Maximum bed height range is **unladen**.
 2. Fixed-Platform, High-Cycle Models also available for 90- and 102-inch body widths. Bi-Fold, High-Cycle configurations for additional body widths may also be available. Contact factory for details.
 3. **Standard**, aluminum retention ramp serves as 13-inch, folding, platform taper on Bi-Fold Railgate models.
 4. Aluminum platforms are available in depths from 35-70 inches (in 5-inch increments).



Woodbine Manufacturing Inc.
83 Bus Brown Drive
Woodbine, IA 51579

TOMMY GATE® LIFTGATES
(800) LIFTGATE
TOMMYGATE.COM

RAILGATE
SERIES